

Emergency Pendant / Wrist Transmitter (WTRZ Series)


Easy & Exchangeable Belt / Neck Cord styles

Long battery life

Waterproof

● **Active Button**

- Pressing the Active Button for more than 1 second will activate the Control Panel, causing it to dial emergency call or alarm.
- Press and hold the Active Button for 8 seconds to send a Cancel Code to the Control Panel. (This function is not compatible with every control panel).

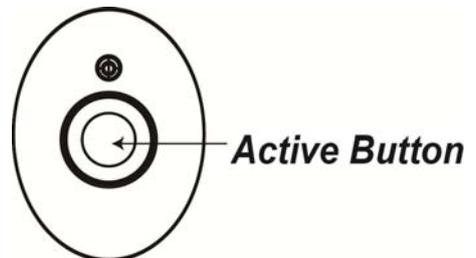

● **Learn in the Transmitter**

- Step 1. Put the Control Panel into the learning mode.
- Step 2. Press the Button on the Transmitter, a radio signal will be transmitted to the Control Panel.
- Step 3. Please refer to the operation manual of your Control Panel to complete the learning process.

● **Battery Life**

The Transmitter uses one CR2032 3V Lithium battery as its power source.


<NOTE>

- ☞ A 30-second interval is required between each Active Button press to check the battery voltage again.


● **Switching Between Wrist Band/Neck Cord**

- If you wish to use a Wrist Transmitter, please put the Transmitter into the Rubber Cover and thread the wrist band through the Rubber Cover.
- If you wish to switch the Transmitter to Pendant please follow the steps:


Step 1. Take off the Wrist Band on the Rubber cover.



Step 2. Remove the Transmitter from the Rubber cover.

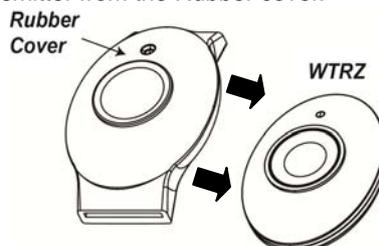

Step 3. Thread Neck cord through the hook.



● **Auto Low Battery Detection**

The Wrist Transmitter features Auto Low Battery detection function.

- The Wrist Transmitter will automatically check battery voltage every 16-24 hours. If low battery is detected 3 times in a row, the Wrist Transmitter will enter low battery status and transmit low battery signal every 12 hours.

● **Compliance with Standards**

Complies with the requirements of the Radio Equipment Directive 2014/53/EU

Electromagnetic Compatibility Directive 2014/30/EU, Low Voltage Directive 2014/35/EU

Safety: EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

EMC: EN 50130-4:2011+A1:2014

EN 301489-1:V2.2.0:2017

EN 301489-3:V2.1.1:2017

Radio: EN 300220-1:V3.1.1:2017

EN 300220-2:V1.1.1:2017

EN 300220-3-1:V1.1.1:2017

EN 300220-3-2:V1.1.1:2017

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Caution:

To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance may void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).